


TECTUM PLANK - OPENING DETAIL

BAR JOIST CONSTRUCTION

FOR LONG SPAN PLANK, ANY OPENING WITHIN 4" OF THE LONG EDGE MUST HAVE SUPPLEMENTARY SUPPORT.

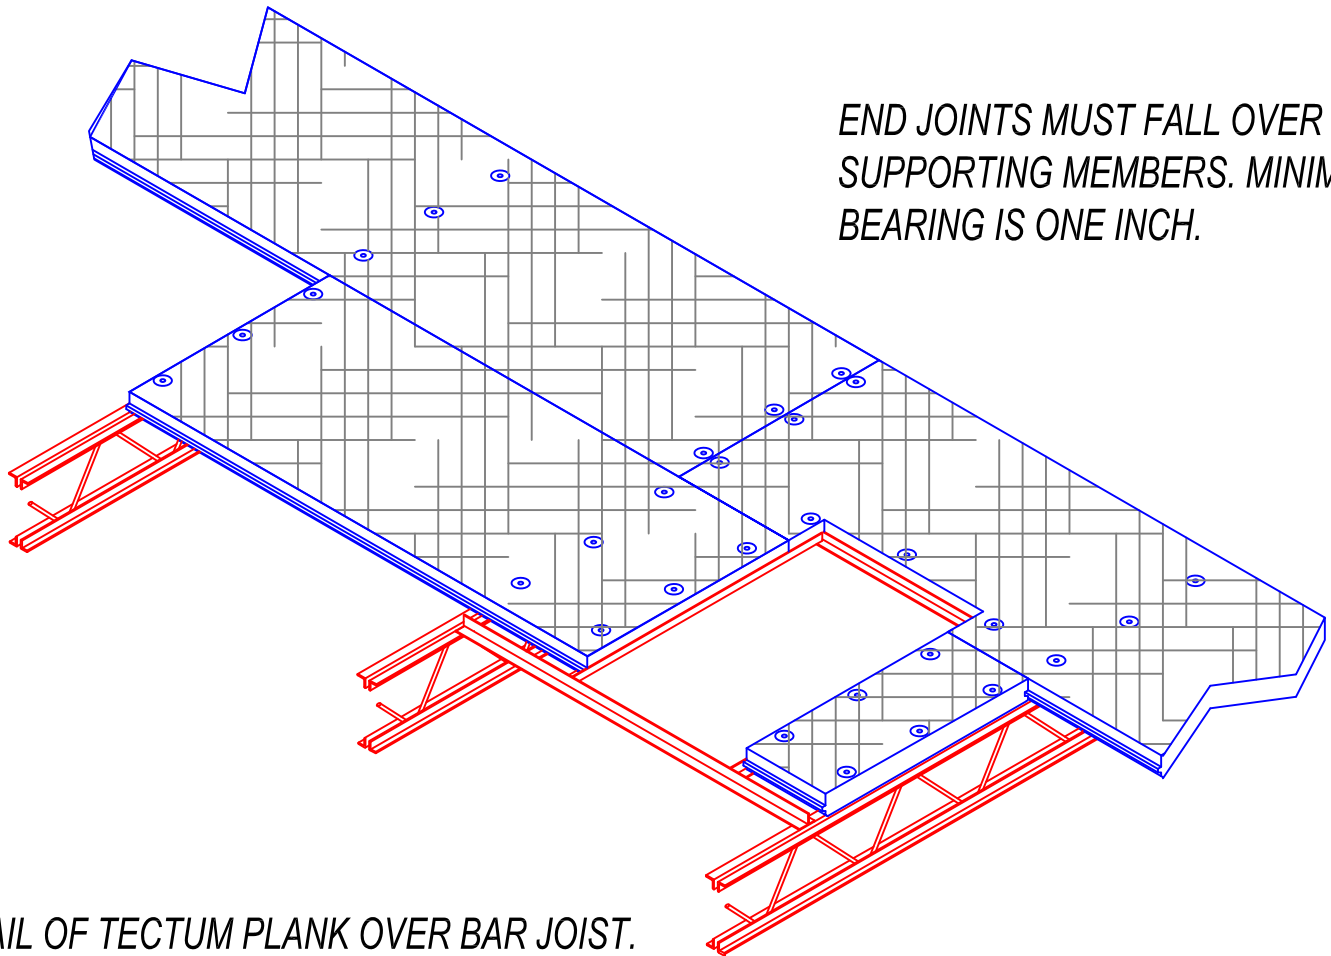

END JOINTS MUST FALL OVER SUPPORTING MEMBERS. MINIMUM BEARING IS ONE INCH.

DETAIL OF TECTUM PLANK OVER BAR JOIST. SUPPLEMENTARY FRAMING REQUIRED FOR OPENINGS GREATER THAN 8" IN ANY DIRECTION. SCREW ATTACH PANELS TO THE FRAMING FOR THE OPENING. SPACING DEPENDANT ON UPLIFT AND DIAPHRAGM REQUIREMENTS.

PLANK OPENING STEEL DETAIL

DETAIL NUMBER:

2014

SCALE : NTS

Revised: 03/28/2016

TECTUM_{INC.}

The Noise Control Solution