


# TECTUM PLANK - OPENING DETAIL

FOR LONG SPAN PLANK, ANY OPENING WITHIN 4" OF THE LONG EDGE MUST HAVE SUPPLEMENTARY SUPPORT.

END JOINTS MUST FALL OVER SUPPORTING MEMBERS.  
MINIMUM BEARING IS ONE INCH.

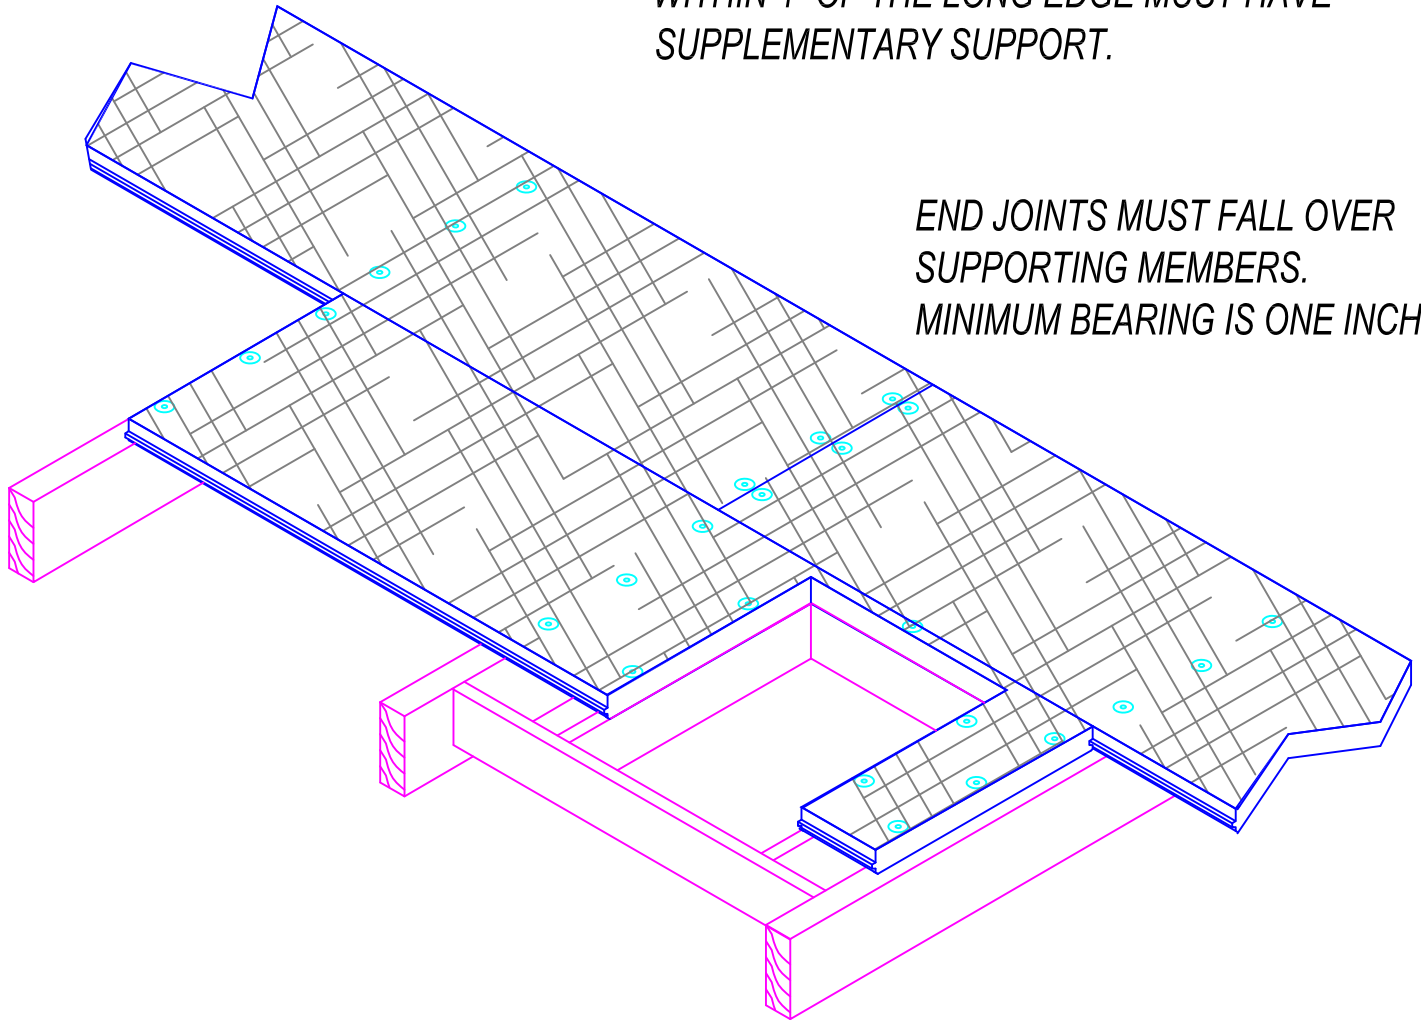

DETAIL OF TECTUM PLANK OVER WOOD MEMBERS SUPPLEMENTARY FRAMING REQUIRED FOR OPENINGS GREATER THAN 8" IN ANY DIRECTION. SCREW ATTACH PANELS TO THE FRAMING FOR THE OPENING. SPACING DEPENDANT ON UPLIFT AND DIAPHRAGM REQUIREMENTS.

## PLANK OPENING WOOD DETAIL

DETAIL NUMBER:

**2015**

**SCALE : NTS**

**Revised: 03/28/2016**

**TECTUM**<sub>INC.</sub>  
The Noise Control Solution