




ADHESIVE MEETING THE REQUIREMENTS OF AFG-01 WHEN REQUIRED.



DEKFAST #14 SCREWS WITH A 1½" WASHER OR TRUFAST HD SCREW

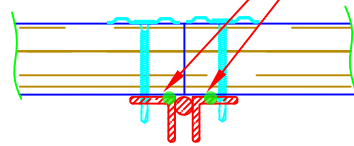

S-25 SCREW WITH 2" WASHER

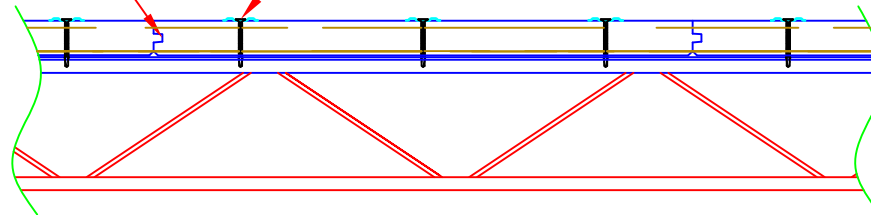

TYPICAL END AND SIDE DETAIL FOR TECTUM ROOF DECKS ATTACHED TO BAR JOIST. SCREW SPACING AND NUMBER PER PANEL WIDTH IS SHOWN ON OTHER DRAWINGS.

TECTUM III, E, AND NS DECK USES DEKFAST #14 SCREWS WITH A 1½" WASHER OR TRUFAST HD SCREWS. PRE DRILLING IS REQUIRED FOR 1/8" THICK OR THICKER STEEL.

DECK SCREWED TO BAR JOIST

DETAIL NUMBER:

2004

SCALE : NTS

Revised: 03/24/2016

TECTUM_{INC}

The Noise Control Solution