




TECTUM ROOF DECK OVER WOOD

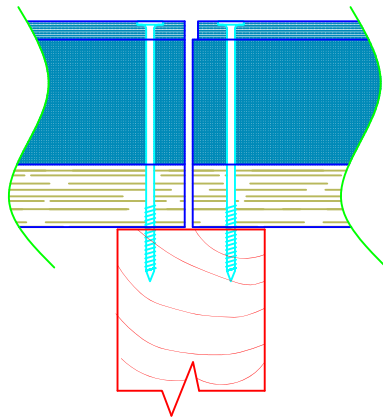

TECTUM III, E, AND NS DECKS
USE TRUFAST SCREWS OR DEKFAST
#14 SCREWS WITH $1\frac{1}{2}$ " WASHER.
MINIMUM LENGTH IS ONE INCH LONGER
THAN PANEL THICKNESS.
 $1\frac{1}{2}$ " PENETRATION PREFERRED.

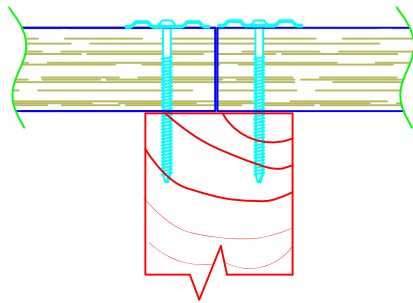

TECTUM I DECK USES DEKFAST
#14 SCREWS WITH 2" WASHER.
MINIMUM LENGTH IS ONE INCH LONGER
THAN PANEL THICKNESS.
 $1\frac{1}{2}$ " PENETRATION PREFERRED.

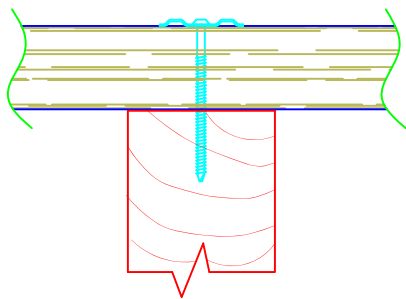

ONE ROW OF SCREWS IS
REQUIRED AT INTERMEDIATE
SUPPORT.

NOTE: A $\frac{3}{8}$ " BEAD OF CONSTRUCTION ADHESIVE IS
REQUIRED WHEN SPECIFIED.

DECK SCREWED TO WOOD

DETAIL NUMBER:

2006

SCALE : NTS

Revised: 03/24/2016

TECTUM_{INC.}
The Noise Control Solution